


# Multi-Level Model with Events

L3

L2

L1

L0

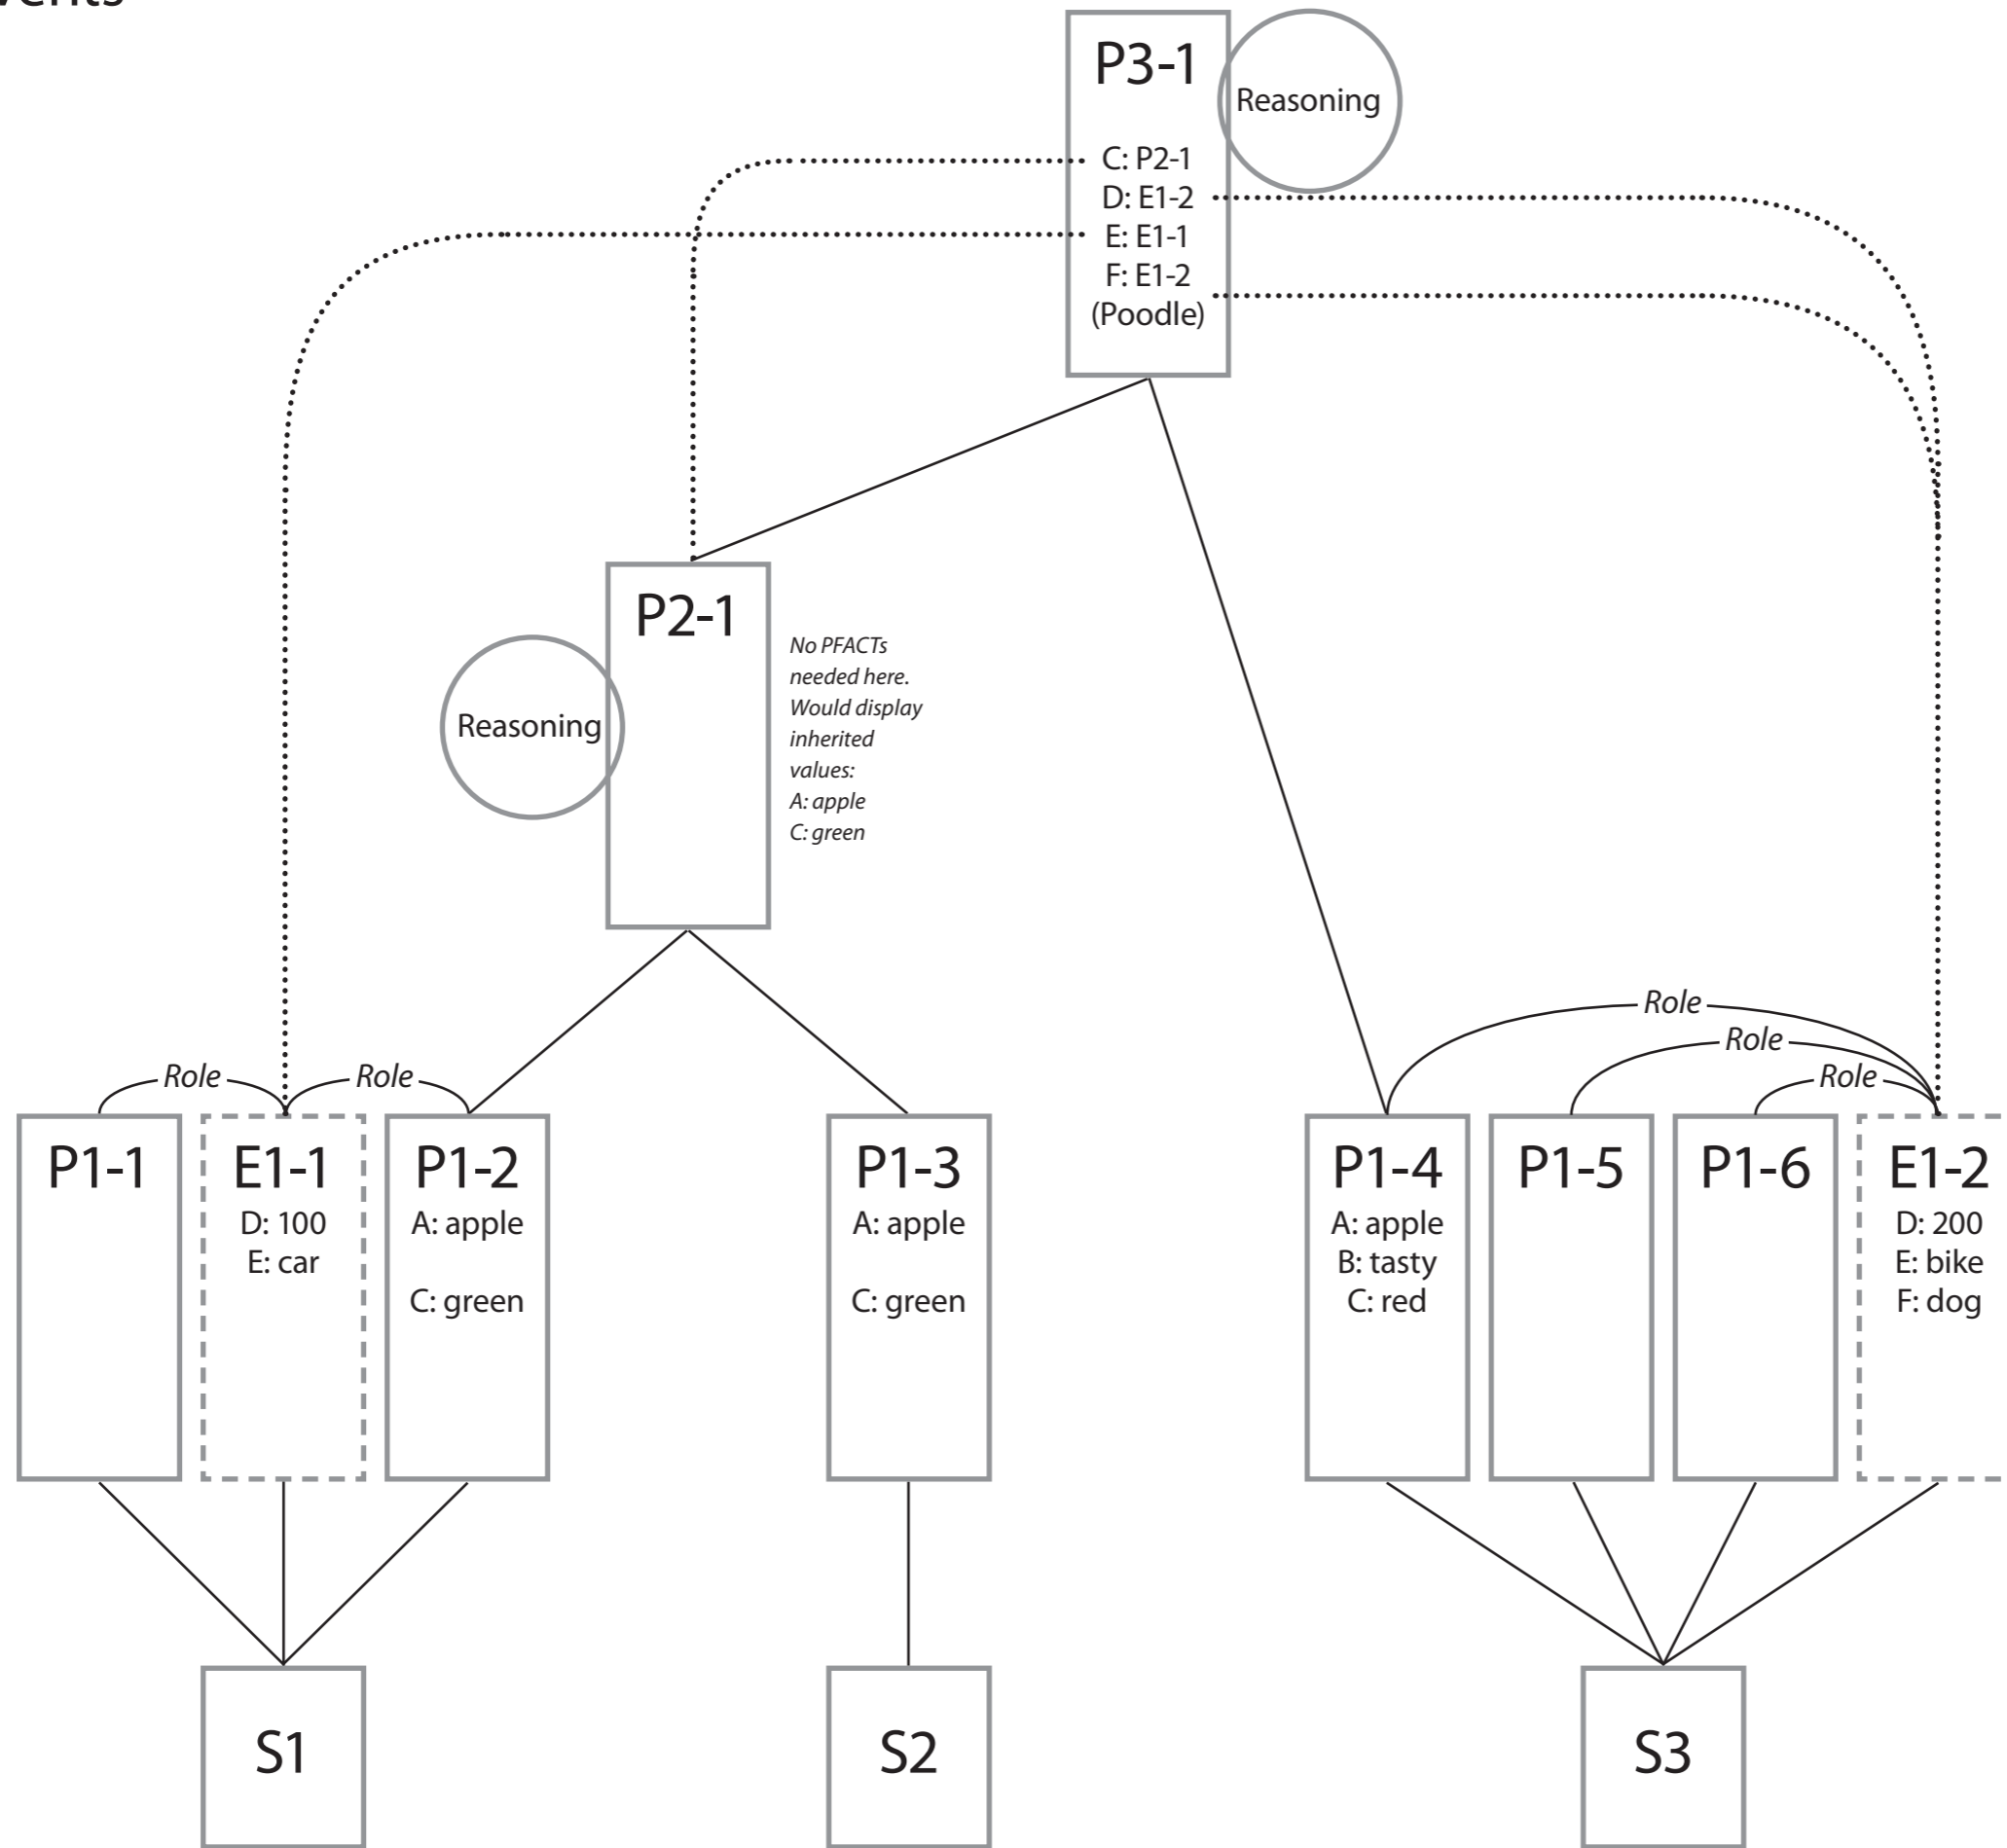

In P3-1, conflicting PFACTs C, D and E are solved by »ponting« to the preferred value.

Also, F is given additional Information – without a Source! This could be a Note for clarification, and should be explained in the Reasoning.

P3-1 should display and print with these PFACTs:

- A: apple
- B: tasty
- C: green
- D: 200
- E: car
- F: dog (Poodle)